

MIL-DTL-38999 Series II

MIL-DTL-38999 series II circular connector is designed for quick bayonet coupling, solder contact and removable crimp contact, EMI/RFI shielding, high contact density, small size, light weight, short shell and mating hermetic.

This family of circular connectors is offered 3 kinds of shell of different material, 9 kinds of size shell, 3 kinds of finishes, 2 plug styles, 5 receptacle-mounting styles, 4 kinds of contact and more than 50 kinds of contact layout.



How to order

RF Basic series	27513	T	18	C	35	P	N
--------------------	-------	---	----	---	----	---	---

Type of connector

27473 = Plug
 27472 = Wall mounting square receptacle, front
 27497 = Wall mounting square receptacle, rear
 27513 = Box square receptacle, front
 27508 = Box square receptacle, rear
 27474 = Jam nut receptacle
 27484 = Shielded plug

Shell

T = With thread and accessory
 E = Without thread or accessory

Shell size

08, 10, 12, 14, 16, 18, 20, 22, 24

Finish

B = Olive green cadmium plating
 C = Black anodized
 E = Passivated stainless steel
 F = Electroless nickel plating

Contact layout (See below)

Type of contact

P = Crimp pin
 S = Crimp socket
 PH = Solder pin
 SH = Solder socket
 PL = Long PCB pin
 PC = Short PCB pin
 SL = Long PCB socket
 SC = Short PCB socket

Orientation

N = Normal
 A, B, C, D

Electrical

Contact resistance and current rating:

Contact ID	Diameter (mm)	Resistance (mΩ)	Current (A)
22D#	Φ 0.76	≤ 12	5.0
20#	Φ 1.00	≤ 5.0	7.5
16#	Φ 1.60	≤ 2.5	13.0
12#	Φ 2.40	≤ 1.5	23.0

EMI shielding:

100MHz~1GHz: minimum attenuation 85 dB
1GHz~10GHz: minimum attenuation 50 dB

Withstanding voltage (V):

Service rating	M	I	II
Sea level	1300	1800	2300
21000m	800	1000	1000

Insulation resistance:

Normal ≥ 5000MΩ, damp heat ≥ 100MΩ

Electrical continuity between shells:

E class ≤ 5.0mΩ, B class ≤ 2.5mΩ, F class ≤ 1.0mΩ

Mechanical

- Shell: Aluminum alloy, stainless steel or copper-alloy
- Plating:

B class: Olive green cadmium plating

C class: Black anodized

E class: Stainless steel passivated

F class: Electroless nickel plating

- Insulator: Thermo-set plastic
- Grommet and seal: Silicon rubber
- Contact: Copper alloy with gold plated,
- Endurance: 500 cycles
- Vibration:

Random vibration: at frequency: 100 ~ 1000 Hz, density of power chart: 1 G2/Hz

- Shock: at 3 ms half sinusoid, peak value of acceleration: 300 g

Environmental

- Operating temperature:

B class: -65 °C ~ +175 °C

C, E, F class: -65 °C ~ +200 °C

- Salt spray: According to method from MIL-DTL-38999

F class 48h

C class 96h
















B class 500h

E class 1000h

- Relative humidity: 98 % at 40 °C
- Operating height: ≤ 30480m






















Contact layout

 08-35 M	 08-98 I	 10-35 M	 10-98 I	 10-05 I	 10-99 I
 12-35 M	 12-98 I	 12-04 I	 12-08 I	 12-03 II	
 14-35 M	 14-18 I	 14-05 II	 14-97 I		




APMA


 20-25 I	 20-24 I	 20-02 M	 22-35 M
 22-55 I	 22-53 I	 22-36 I	 22-34 I
 22-32 I	 22-21 II	 22-97 I	 22-99 II
 24-35 M	 24-61 I	 24-29 I	 24-24 I
 24-43 I	 24-19 I	 24-04 I	

Environmental

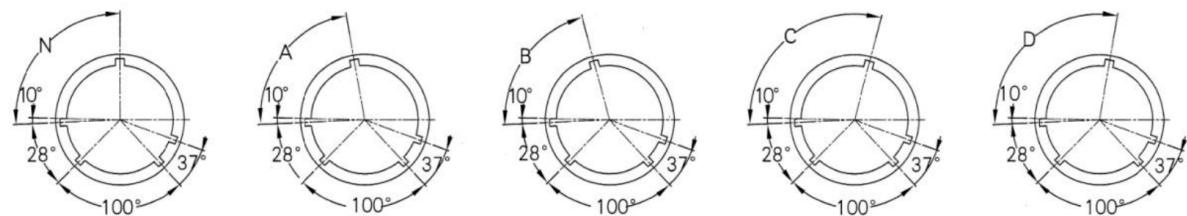Receptacle



Plug

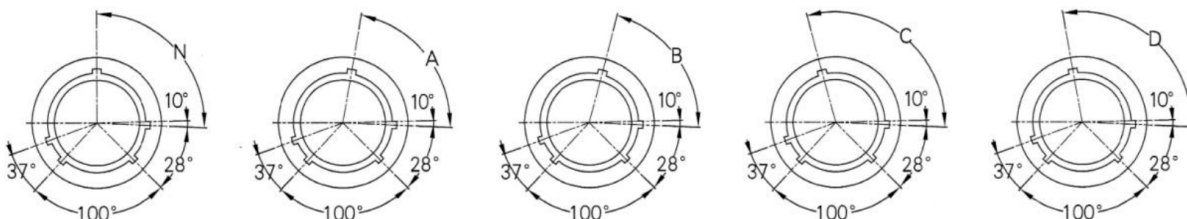


○ 22D# ● 20# ◐ 16# ◑ 12#

Orientation ID	08	10	12	14	16	18	20	22	24
N	100 °	100 °	100 °	100 °	100 °	100 °	100 °	100 °	100 °
A	82 °	86 °	80 °	79 °	82 °	82 °	82 °	85 °	85 °
B	-	72 °	68 °	66 °	70 °	70 °	70 °	74 °	74 °
C	-	128 °	132 °	134 °	130 °	130 °	130 °	126 °	126 °
D	118 °	114 °	120 °	121 °	118 °	118 °	118 °	115 °	115 °


Shell size

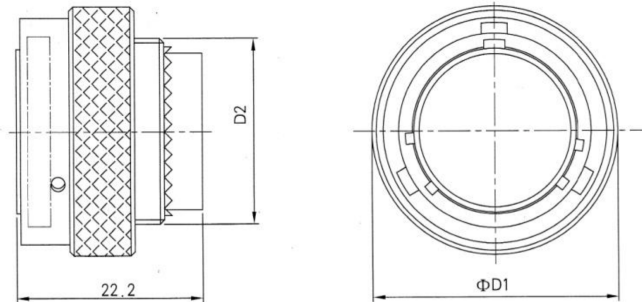Plug (RF27473 and RF27484)




Shell No.	D1	Thread D2 UNEF-2A
08	19.00	0.4375-28
10	21.80	0.5625-24
12	26.20	0.6875-24
14	29.30	0.8125-20
16	32.50	0.9375-20
18	35.70	1.0625-18
20	38.80	1.1875-18
22	41.68	1.3125-18
24	44.86	1.4375-18

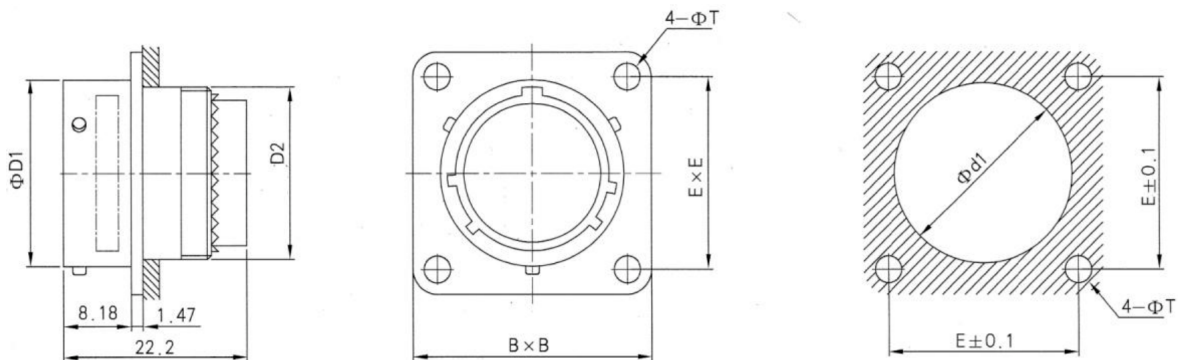Wall mounting square receptacle, front (RF27472)



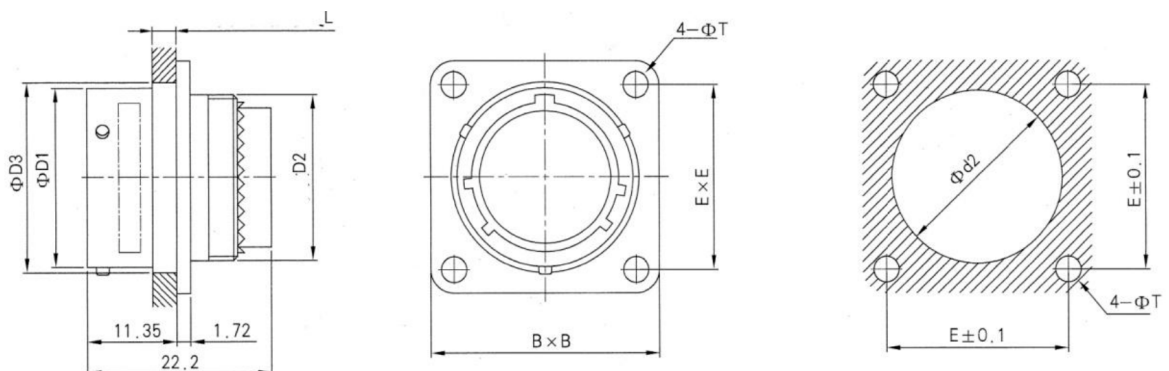
Wall mounting square receptacle, rear (RF27497)






Shell No.	D1	Thread D2 UNEF-2A	D3	L (max)	B	E	T	d1	d2
08	12.00	0.4375-28	13.20	3.71	21.00	15.09	3.2	12.5	14.2
10	15.00	0.5625-24	16.14	3.71	24.10	18.26	3.2	15.5	17.5
12	19.05	0.6875-24	20.50	3.71	26.50	20.62	3.2	19.5	21.3
14	22.23	0.8125-20	23.60	3.71	28.90	23.01	3.2	21.5	25.0
16	25.40	0.9375-20	26.80	3.71	31.21	24.61	3.2	25.0	27.3
18	28.58	1.0625-18	30.00	3.71	33.60	26.97	3.2	28.0	31.3
20	31.75	1.1875-18	33.20	4.27	36.80	29.36	3.2	31.5	34.5
22	34.93	1.3125-18	36.35	4.27	40.00	31.75	3.2	34.5	37.5
24	38.10	1.4375-18	39.50	4.27	43.10	34.93	3.9	37.5	40.6

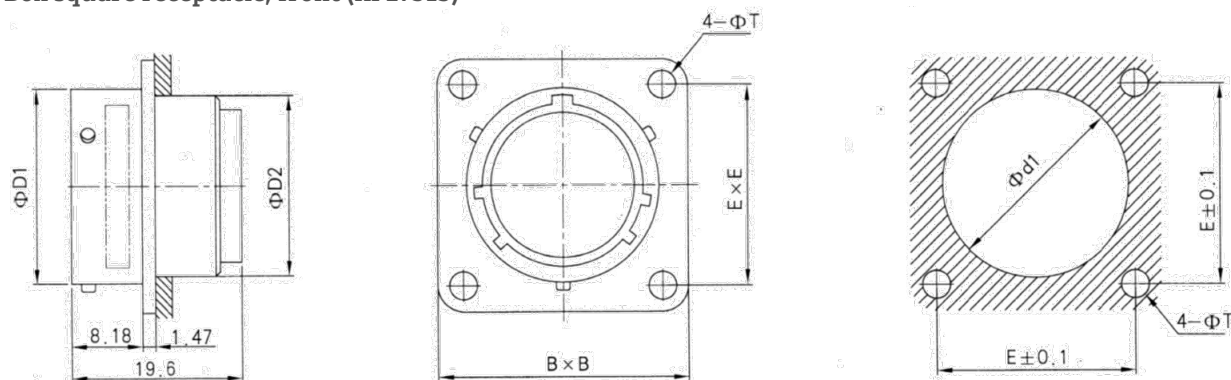Box square receptacle, front (RF27513)




Box square receptacle, rear (RF27508)

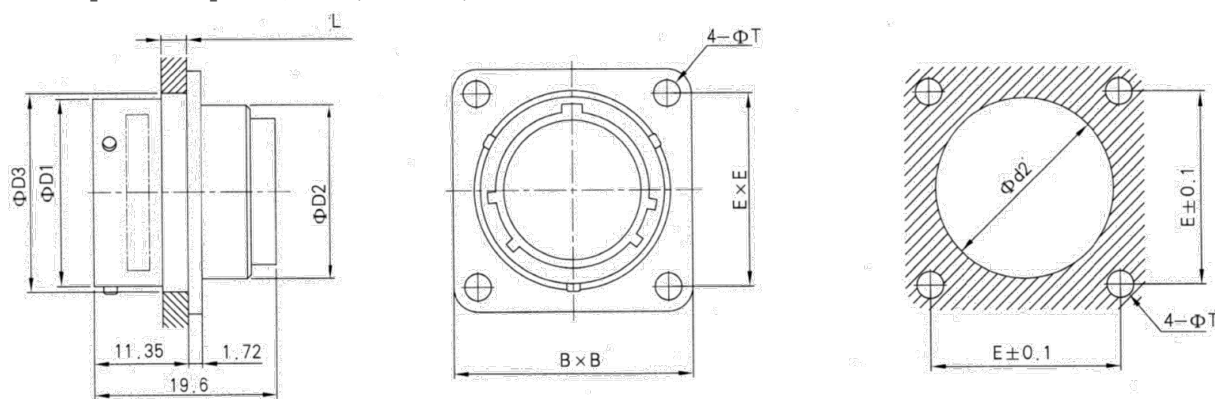

Shell No.	D1	D2	D3	L (max)	B	E	T	d1	d2
08	12.00	11.51	13.20	3.71	21.00	15.09	3.2	12.5	14.2
10	15.00	14.68	16.14	3.71	24.10	18.26	3.2	15.5	17.5
12	19.05	17.86	20.50	3.71	26.50	20.62	3.2	19.5	21.3
14	22.23	21.03	23.60	3.71	28.90	23.01	3.2	21.5	25.0
16	25.40	24.21	26.80	3.71	31.21	24.61	3.2	25.0	27.3
18	28.58	26.97	30.00	3.71	33.60	26.97	3.2	28.0	31.3
20	31.75	30.18	33.20	4.27	36.80	29.36	3.2	31.5	34.5
22	34.93	33.32	36.35	4.27	40.00	31.75	3.2	34.5	37.5
24	38.10	36.53	39.50	4.27	43.10	34.93	3.9	37.5	40.6

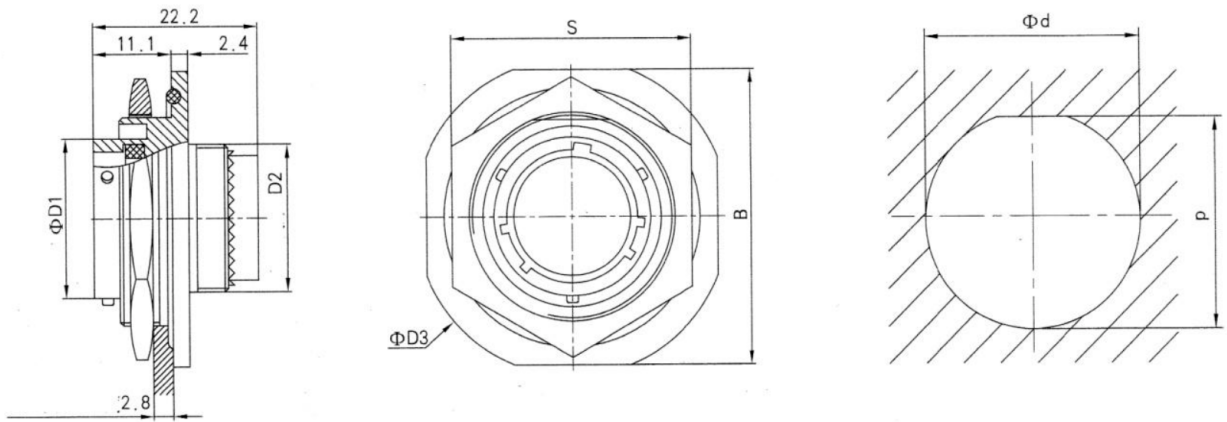
Jam nut receptacle (RF27474)




Shell No.	D1	Thread D2 UNEF-2A	D3	A	B	S	d	p
08	12.00	0.4375-28	34.95	11.1	31.75	27.40	22.46	21.08
10	15.00	0.5625-24	38.10	11.1	34.95	30.61	25.58	24.26
12	19.05	0.6875-24	41.28	11.1	38.10	33.75	28.80	27.53
14	22.23	0.8125-20	44.45	11.1	41.28	36.96	31.98	30.68
16	25.40	0.9375-20	49.23	11.1	45.24	40.10	35.15	33.86
18	28.58	1.0625-18	51.21	11.1	48.00	43.31	38.28	37.06
20	31.75	1.1875-18	54.38	11.8	51.21	46.45	41.50	40.03
22	34.93	1.3125-18	57.53	11.8	54.36	51.23	44.68	43.21
24	38.10	1.4375-18	60.71	11.8	57.53	54.41	47.85	46.38

Receptacle with PCB contact

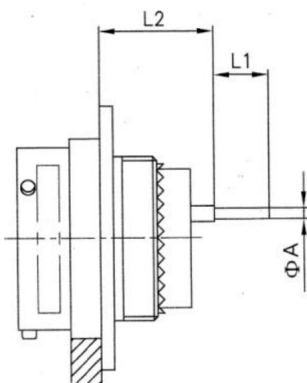RF27497



RF27474

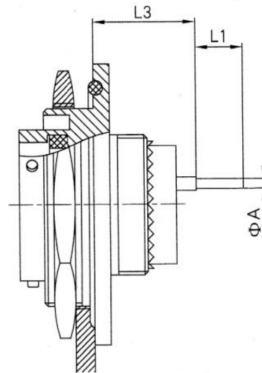

Type for PCB contact		L1	A
22D#	Long PCB contact	8.5	0.7
	Short PCB contact	4.0	
20#	Long PCB contact	8.5	0.7
	Short PCB contact	5.1	
16#	Long PCB contact	8.5	1.15
	Short PCB contact	5.1	

Size		Shell No.	Shell No.
		8, 10, 12, 14, 16, 18	20, 22, 24
L2	22D#	13.40	13.40
	16# or 20#	13.57	13.57
L3	22D#	13.61	12.95
	16# or 20#	13.78	13.12